


# Are you drinking enough water

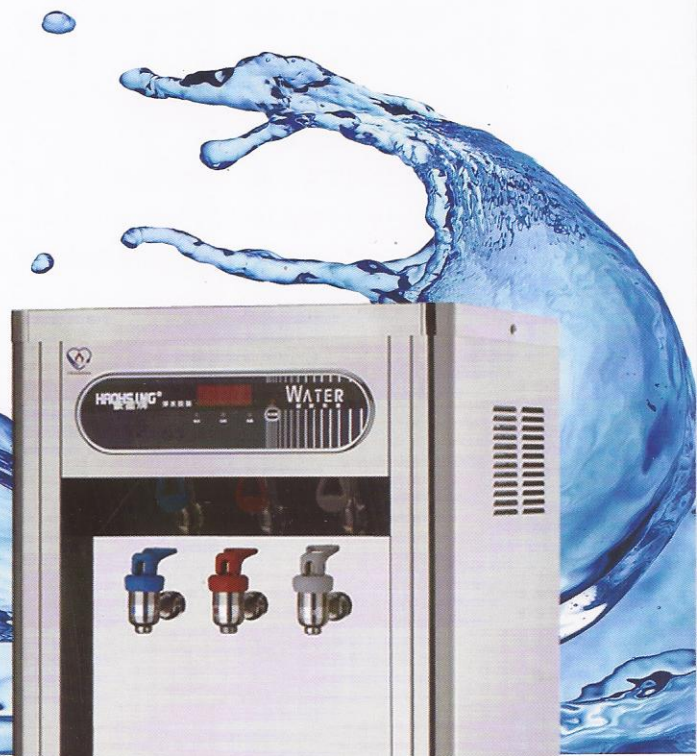


## HM-168系列

開放無壓設計，無爆缸之危險  
數位程式控制面板，穩定故障率低  
國家級飲水標準，驗菌合格保證  
台灣生產製造，品質有保證  
全機外殼不繡鋼材質，實用耐操耐磨  
熱交換結構設計，防止生飲保障健康  
符合食品衛生容器規範，健康更加分

### HM-168 series

Instant design, no dangerous of exploded.  
Digital program to control faceplate, low rate of  
breakdown.  
Made in Taiwan, quality has assurance.  
Cases adopt stainless steel, practical and durable.  
Heat exchange design, avoid drinking raw water.  
Conform FDA standard, more health.

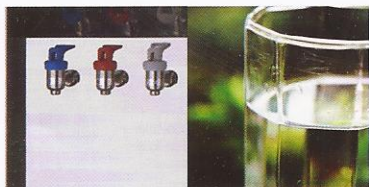


water dispenser

品名	冰溫熱三用飲水機	溫熱二用飲水機
型號	HM-1687	HM-1688
尺寸	寬42×深41×高127cm	
材質	外殼採用不銹鋼材質，內桶採用不銹鋼材質，機架採用不生銹材質	
電壓	AC 110V / 220V 50/60Hz (可依現場電壓交貨)	
容量	熱開水20公升/溫開水8公升/冰開水3公升	熱開水20公升/溫開水8公升
出水量	每小時:熱開水15公升/溫開水10公升/冰開水7公升	每小時:熱開水15公升/溫開水10公升
功率	熱開水750W 冰開水210W	熱開水750W
熱交換系統	高效率熱交換桶	
安全裝置	2P30A漏電斷路器、過熱保護開關、過載保險絲	
附加配備	HM-1687 / HM-1688：過濾器兩組（第一組纖維濾心、第二組活性炭濾心） HM-1687 / HM-1688：RO逆滲透純水機（本型濾材符合NSF相關規範）	
可選購配備	無障礙飲水台 / 熱水防燙保護開關 / 定時排放殺菌功能	
出水溫度	熱開水90~100°C、溫開水20°C~50°C、冰開水6°C~15°C，均±10°C	
其他功能	具電源燈、加熱燈、再沸騰燈，LED溫度顯示功能，具再沸騰鈕，缺水、過熱及漏電多重斷電保護功能	
品質保證	通過國家標準CNS3910、CNS3765、IEC60335-2-15及CNS13783-1檢驗合格 榮獲國家品質商品驗證登錄證書	
責任保證	本公司已投保2000萬產品責任險	
衛生保證	產品符合衛生署公告食品衛生容器規範，標準檢驗局檢驗認證，健康更加分	
綠色保證	產品榮獲環保署環保標章認證HM-1687(不含RO) 工研院能源局節能標章認證HM-1687	

豪星工業有限公司  
HAOHSING®

Are you drinking  
enough water

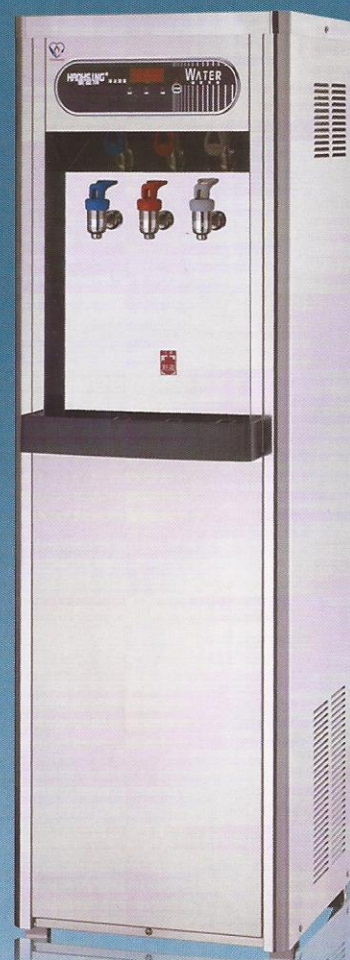

<b>NAME</b>	Hot/Warm/Cold Water Dispenser	Hot/Warm/Cold Water Dispenser
<b>MODEL NO</b>	HM-1687	HM-1688
<b>DIMENSION</b>	W42*D41*H127(cm)	
<b>MATERIAL</b>	All cases and water tanks adopt stainless steel material	
<b>VOLTAGE</b>	AC 110V/220V 50/60Hz	
<b>CAPACITY</b>	Hot /15L、Cold /3L、Warm /8L	Hot /15L、Warm /8L
<b>WATER DISCHARGE</b>	Hot 18L/ Warm 10L/ Cold 7L/ 1H	Hot 18L/ Warm10L/ 1H
<b>DUTY</b>	Hot /750W、Cold /210W	Hot /750W
<b>HEAT EXCHANGE</b>	High efficiency heat exchange	
<b>SAFETY SETTING</b>	2P30A leakage circuit breaker, overheat protect switch, overload fuse	
<b>ADDITIONAL FILTRATION</b>	2-stage filtration, RO system	
<b>OPTIONAL EQUIPMENT</b>	Drinking equipment for disable, Hot water safety switch for child、Timed sterilization	
<b>TEMPERATURE OF DISPENSEING</b>	Hot 90°C-100°C、Warm 20°C-50°C、Cold 6°C-15°C(± 10°C)	
<b>FUNCTION</b>	Power light, heating light, re-boil light, LED temperature display, re-boil button, safety precautions for water shortage, overheat, leakage, and power shortage	
<b>ASSURANCE</b>	Quality: Pass CNS3910, CNS3765, IEC60335-2-15 and CNS13783-1. Responsibility: 20 Million product insurance. Hygiene: Conform the standard of FDA Green product: EPA green mark HM-1687 (without RO) BOE energy mark HM-1687	

豪星工業有限公司  
hao hsing industrial co.,ltd.

